

SOLO-NX

GSM or 3G Intercom for up to 1000 users

UP TO 1000 USERS CAN OPERATE DOOR/GATES BY PHONE

SOLO-NX is an audio GSM Door phone device. It calls on predefined mobile and/or landline (PSTN) phones when visitors visit your home, office, holiday house or other premises so you can talk to them and grant them access - by pressing a key combination on your mobile phone or by sending short text message to the **SOLO-NX** device.

Up to **1000** users can remotely open doors, gates and other access control devices by calling the **SOLO-NX** device (free of charge - with Caller ID recognition).

SOLO-NX can be ordered in a housing for surface (standard) or flush mounting (on customer request), with **1, 2 or 4 call buttons**. Solutions with more call buttons (up to 20, 40,...) are also available upon special customer requests. The device can be upgraded with the CodeLock keypad (type SOLO-NX/CL).

It is **ALL in ONE** and it is **very easy to install**.



Features

- GSM door phone to GSM or landline phone communication
- Easy door release by using mobile phone (no internal unit needed)
- Easy access by free call (Caller ID recognition) up to 1000 users
- High quality audio
- Stainless steel brushed front plate
- NEW F-OTA function - Upgrade FW of the device Over The Air
- Wiegand 26/72 input & output
- Up to 1000 access entry codes on Wiegand for connecting different types of proximity card readers and access entry keypads
- All in one
- Very easy and quick installation
- Surface or Flush mounting
- Illuminated Push button or Piezo button - optional
- 2 relay outputs, 2 alarm inputs
- Up to 5 users per call button
- 20.000 event log entries with timestamps
- Additional mode of use - TAXI CALL POINT
- Remote management: Web server, Android, IOS


Technical Specifications

Power Supply	12,0V - 20,0V AC or 12,0V - 24,0V DC
Current consumption - transmitting mode	250mA
Current consumption - idle mode	40mA
4 (2G) or 5 (3G) band GSM module	850/900/1800/1900 MHz
Unit dimensions	156 x 116 x 71 mm
External Antenna SMA	1
GSM or 3G options available	YES


Accessories



Ext. power supply
100 - 230V AC/
15,0 V DC



Outdoor GSM antennas
(antivandal, patch, magnetic)




Also available for
flush mounting



Options: 1, 2 or 4 call buttons
with illuminated directory, metal
or stainless steel housing, with
antivandal antenna on top, ...

EASYSET - Programming SW for PC and Smartphone app

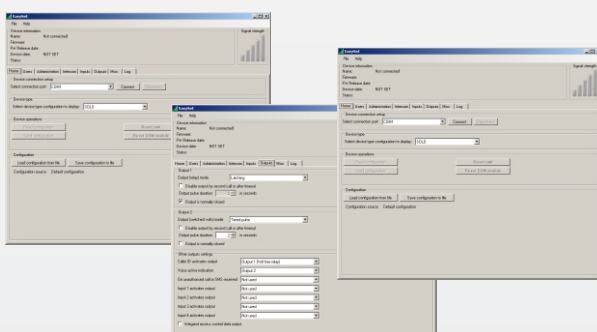

Mars Commerce

Mars Commerce d.o.o.
Ulica Mirka Vadnova 19, SI 4000 Kranj, Slovenija
ph: + 386 4 280 74 00, fax: + 386 4 234 08 81
www.mars-commerce.com
email: sales@mars-commerce.com